


Introducing Triad's Fit-All Solid Replacement Panel

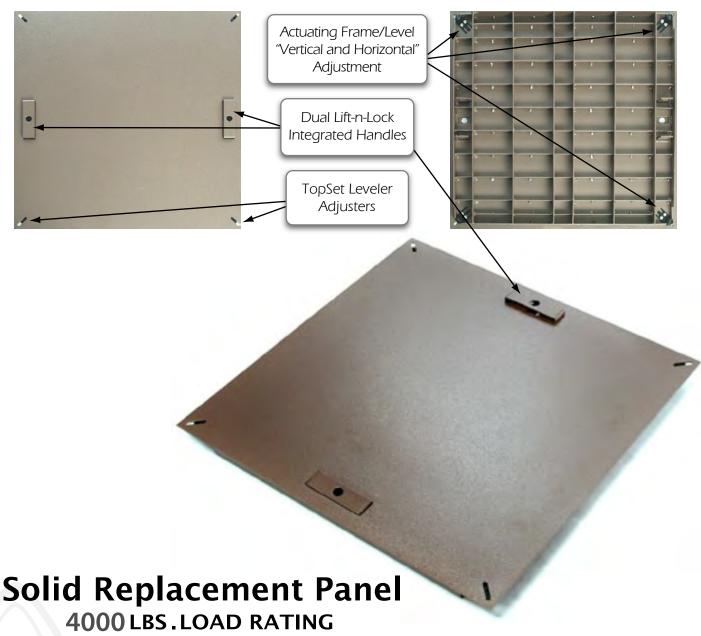

FIT-ALL DESIGN FITS ALL FLOOR SYSTEMS

PANEL TYPE	MODEL	LOAD RATING	AVAILABLE FEATURES	COMPATIBILITY
Solid Heavy Duty Panel	Imperial 15TSD 30TSD 50TSD	1500 lb/560 kg 3000 lb./1120 kg 5000 lb./1860 kg *Using ADVP conversion	Dual Handles Horizontal & vertical levelers Size: 24" x 24" 600 x 600 mm	Available in both Imperial and Metric Sizes (Aluminum, Cement Fill,
	Metric 15TSDM 30TSDM 50TSDM			Hollow Steel, Woodcore) ALL STRINGER TYPES with width of 1.75" OR LESS.

TRIAD STATIC DISSAPATIVE TEXTURED POWDERPLATE COATINGS

















These color samples are representative only and will vary from the actual color depending on the computer monitor or printer used to view them. For accurate color, gloss and texture sample contact Triad. Conductive and chemical resistant coatings are available upon request.

Additional Triad® Airflow panel Key Features

- Static Dissipative Textured PowderPlate finish eliminates delamination and missing/broken Edge trim issues.
- Integrated Lift-N-Lock handles provide safer access with the ability to secure access if required
- TopSet levelers are designed for easy leveling to different raised floor panels
- Hi-Plume fin provides controlled stratification levels by simple panel rotation. Turn fin into air flow for higher stratification of upper server racks or turn fin away from air flow for lower stratification level
- ICETM Airflow Panels provides 3-4 times cfm delivery than industry standard perforated panels
- One panel fits most all new or existing raised floor systems.

Patent Pending Features:



Lift-N-Lock® Handle



Hi-Plume fin™ provides high server stratification



TopSet[™] leveler with Liebert handle key inserted

